

Rustic class

Wood is a natural, uneven and hygroscopic material which reacts to the changes of moisture in the environment.

Profiles made of Siberian larch are classified according to one, better side by **SRPS EN 1611-1:2007** standard.

Rustic class completely meets the criteria of C class.

Each profile must be usable as a final product, with at least **90%** of its length.

Up to 5% of the profile in a delivery may have deviations which do not meet the criteria for C class.

At the moment of the delivery, Siberian larch profile can vary within the range of **16 ± 2 %** in moisture.

GUARANTEE STATEMENT

The guarantee for the delivered material does not cover hidden faults arising from natural characteristics of wood. They include: change in colour, change in dimensions due to the changes in moisture of the wooden profiles, slight twisting, i.e. crust formation on the profile, as well as changes shown in the classification table which refer to cracks, flaws and the appearance of resin on the outer sides of the profile.

The guarantee **does not cover** the flaws and changes that occurred in the following cases:

- Flaws due to improper profile assembly
- Changes in colour in natural, coloured and protected profiles
- Shrinking and widening due to the change of moisture of the profile
- Flaws caused by improper profile storage
- Mechanical damages caused deliberately, by negligence or by regular use
- Changes in specific density and moisture of the profile after the deliver
- The appearance of cracks and resin on the outer sides of the profile
- Flaws on the frontal side of the profile which were not noticed during acceptance, i.e. delivery

Rustic class

Technical description

Description	Rustic class
Knots	<p>Allowed:</p> <ul style="list-style-type: none">• Healthy and dead knots, knot groups, connected and cracked knots• Maximum size of a knot must not be more than 50% of the profile width• May contain a knot hole up to 15 mm in diameter

Rustic class

Technical

Description	Rustic class
Cracks	<ul style="list-style-type: none">Allowed up to 400 mm
Flaws on lateral edges	<ul style="list-style-type: none">The allowed damage due to a fallen out knot or processing which does not exceed 20% of the plank width and not longer than 150 mm

Rustic class

Technical

Description	Rustic class
Damaged caused by processing	<p>Allowed:</p> <ul style="list-style-type: none"> Roughness around knots, knife traces, superficial damage up to 20% of the profile width and up to 150 mm long
Bark	<ul style="list-style-type: none"> Allowed at the back
Resin	<ul style="list-style-type: none"> Allowed.
Heartwood	<ul style="list-style-type: none"> Allowed up to 35% of the delivered number of profiles.
Sapwood	<ul style="list-style-type: none"> The presence of sapwood may be up to 30% of the total profile volume.



**The example of a falling out lateral
knot**




The example of a resin pocket and a knot hole



The example of a cross-cut knot



The example of a crack

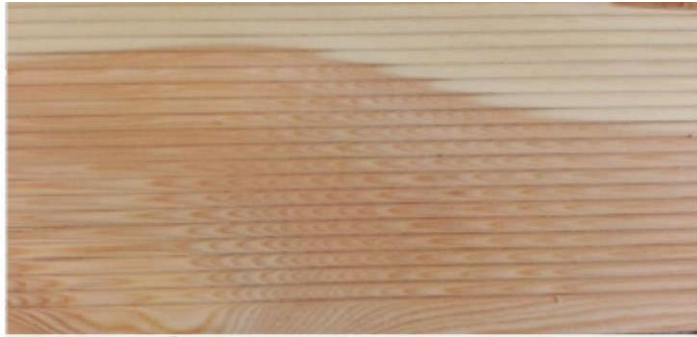

The example of sapwood



The example of a fallen out knot

The example of deck floor covering of Rustic class

